



# MFP1, MFP2 for AWS3 Weld Heads


The MFP weld head series is a servo driven weld head technology designed to be used with the Active Welding System 3. Both products have an integrated displacement measuring system, rapid control response and outstanding dynamic response. Both weld heads deliver outstanding weld process stability and consistent reproducibility

Thanks to their floating bearing with locking cylinder, their outstanding follow-up properties and their short welding times the MFP weld head series is designed for a wide range of resistance welding applications. Maximum reliability and ease of maintenance generate an outstanding cost of ownership and a very long product life in operation.

## CONFIGURATION OPTIONS

The MFP1 and MFP2 weld heads are designed to be used in combination with the AWS3 from MIYACHI PECO. Please find more details in the Technical Data Sheet of AWS3.

## TYPICAL APPLICATIONS




*Electro*




*Electro*




*Medical*



*Automotive*



*Automotive*



*Automotive*



# TECHNICAL SPECIFICATIONS

|                       | MFP2                                                                                                           | MFP2-A | MFP1                                         | MFP1-A |
|-----------------------|----------------------------------------------------------------------------------------------------------------|--------|----------------------------------------------|--------|
| Configuration         | Servo motorised weld head with stand and quick-change electrode system;<br>MFP-A versions are without a stand. |        |                                              |        |
| Closing stroke        | Servomotor-driven                                                                                              |        |                                              |        |
| Welding pressure      | Servomotor-driven                                                                                              |        |                                              |        |
| Weld force max        | 150 – 600 N                                                                                                    |        | 50 – 200 N                                   |        |
| Weld force adjustment | Via NC control unit                                                                                            |        |                                              |        |
| Electrode shape       | Locked, cylindrical, top and bottom d = 10 mm                                                                  |        | Locked, cylindrical, top and bottom d = 6 mm |        |
| Electrode holder      | Quick change holder with anti-torsion protection                                                               |        |                                              |        |
| Max electrode stroke  | 25 mm                                                                                                          |        |                                              |        |
| Secondary cables      | 4x95 mm², 700 mm long                                                                                          |        | 2x95 mm²,700 mm long                         |        |
| Environment temp.     | 0-40 °C                                                                                                        |        |                                              |        |
| Cooling               | Water-cooled electrode holders                                                                                 |        |                                              |        |


# WEIGHT & DIMENSIONS

|                        | MFP2                      | MFP2-A                   | MFP1                      | MFP1-A                   |
|------------------------|---------------------------|--------------------------|---------------------------|--------------------------|
| Weight approx.         | 13 kg w/o secondary cable | 5 kg w/o secondary cable | 13 kg w/o secondary cable | 4 kg w/o secondary cable |
| Dimensions (L x H x D) | 230x490x50 mm             | 151x490x50 mm            | 230x490x45 mm             | 145x490x45 mm            |


# DRAWINGS

MFP1


MFP1-A

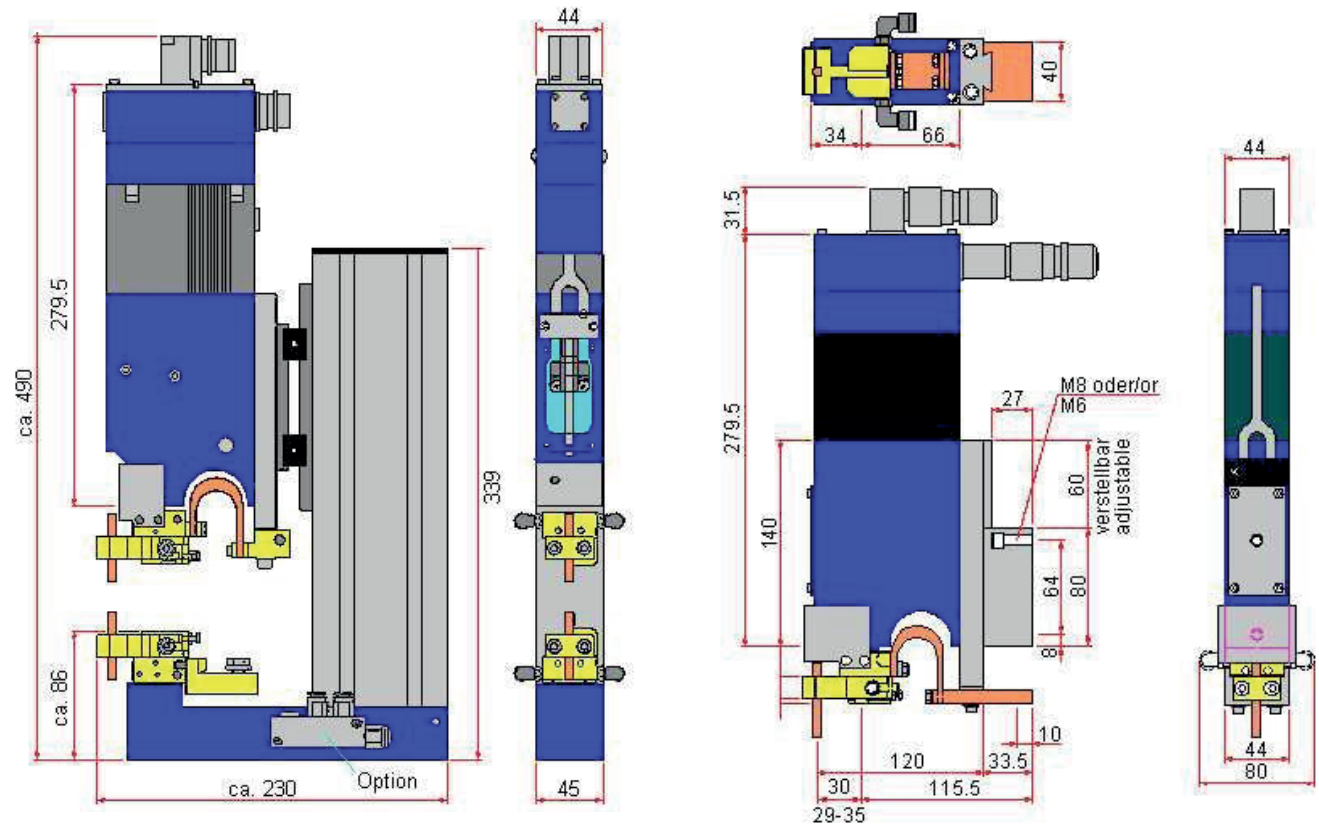

## MFP2

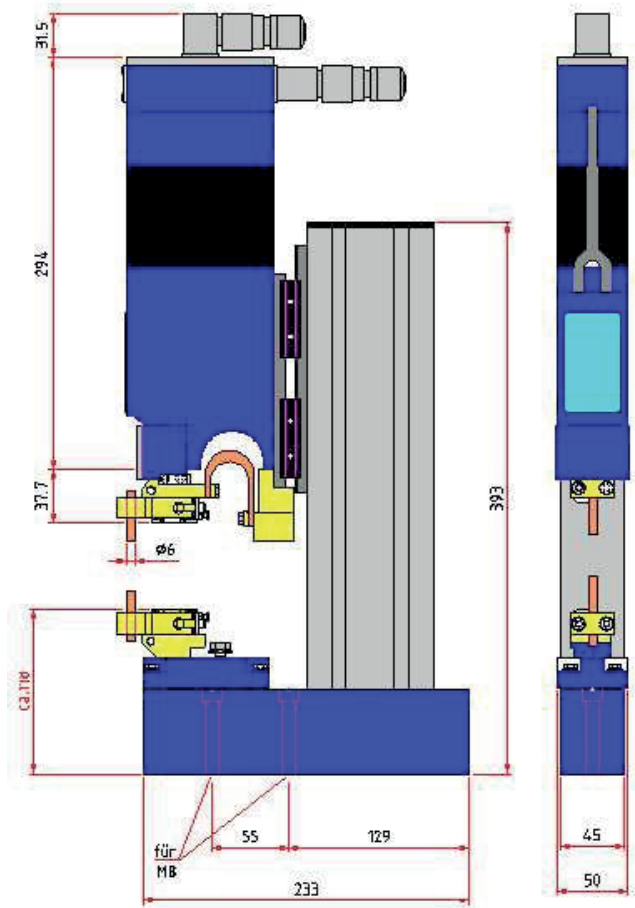

## MFP2-A

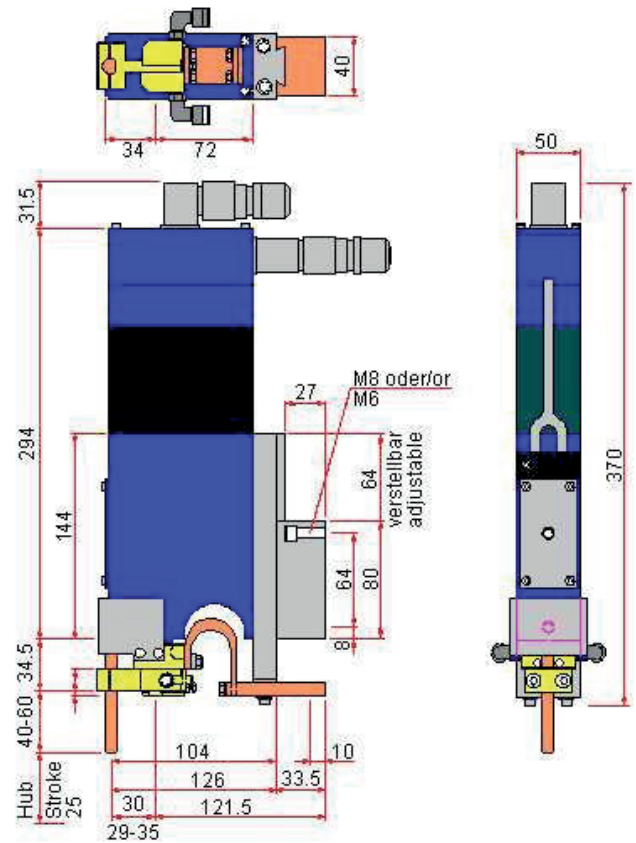

Lindberghstrasse 1 • DE-82178 Puchheim, Germany  
T: +49 (0) 89 83 94 030 • Fax: +49 (0) 89 839403 68  
info@amadamiyachi.eu • www.amadamiyachieurope.com  
ISO 9001 Certified Company

**MIYACHI** **MIYACHI** **MIYACHI**  
**UNITEK** **PEGO** **IA PRO**

### EUROPE

**Amada Miyachi Europe BV**  
Helmond, The Netherlands  
T: +31 (0) 492 542 225  
info@amadamiyachi.eu

**Amada Miyachi Europe Kft.**  
Budapest, Hungary  
T: +36 1 431 9927  
infohu@amadamiyachi.eu

**Amada Miyachi Europe**  
Derby, United Kingdom  
T: +44 (0) 1332 361 238  
info@amadamiyachi.eu

**Amada Miyachi Europe**  
Saint Germain en Laye, France  
T: +33 (0) 139 046 430  
infofr@amadamiyachi.eu

**Amada Miyachi Europe**  
Torino, Italy  
T: +39 011 223 83 16  
infoit@amadamiyachi.eu

**Amada Miyachi Europe**  
Prague-West, Czech Republic  
T: +420 251 512 157  
info@amadamiyachi.eu

### AMERICAS

**Amada Miyachi America Inc.**  
Monrovia, CA, USA  
T: +1-626-303-5676  
info@amadamiyachi.com

**Amada Miyachi do Brasil Ltda.**  
Sao Paulo, Brasil  
T: +55-11-4193-1187  
antonio.ruiz@miyachi.com

### ASIA

**Amada Miyachi Co., Ltd.**  
Noda, Japan  
T: +81-4-7125-6177  
sales@miyachi.com

**Amada Miyachi Shanghai, Co., Ltd.**  
Shanghai, China  
T: +86-21-6448-6000  
zqzhang@msc.miyachi.com

**Amada Miyachi Korea Co., Ltd.**  
Gyeonggi-do, Korea  
T: +82-31-8015-6810  
dykim@mkc.miyachi.com

**Amada Miyachi Taiwan Co., Ltd.**  
Taipei, Taiwan R.O.C.  
T: 886-2-2397-4778  
keigaku@miyachi.com

**Amada Miyachi (Thailand) Co., Ltd.**  
Samutprakarn, Thailand  
T: +66-2751-9337-8  
info@mtl.miyachi.com

**Amada Miyachi Vietnam Co., Ltd.**  
Ho Chi Minh City, Vietnam  
T: +84-8-3771-7972

**Amada Miyachi India Pvt. Ltd.**  
Bangalore, Karnataka  
info@miyachiindia.com

All data, images and text are subject to change at any time. Amada Miyachi Europe GmbH reserves the right to change, modify, delete and add technical specifications and product details at any time without prior notification. © 2015 Amada Miyachi Europe GmbH.

follow us on:

